


Fact sheet

1+0 ONT and Casing

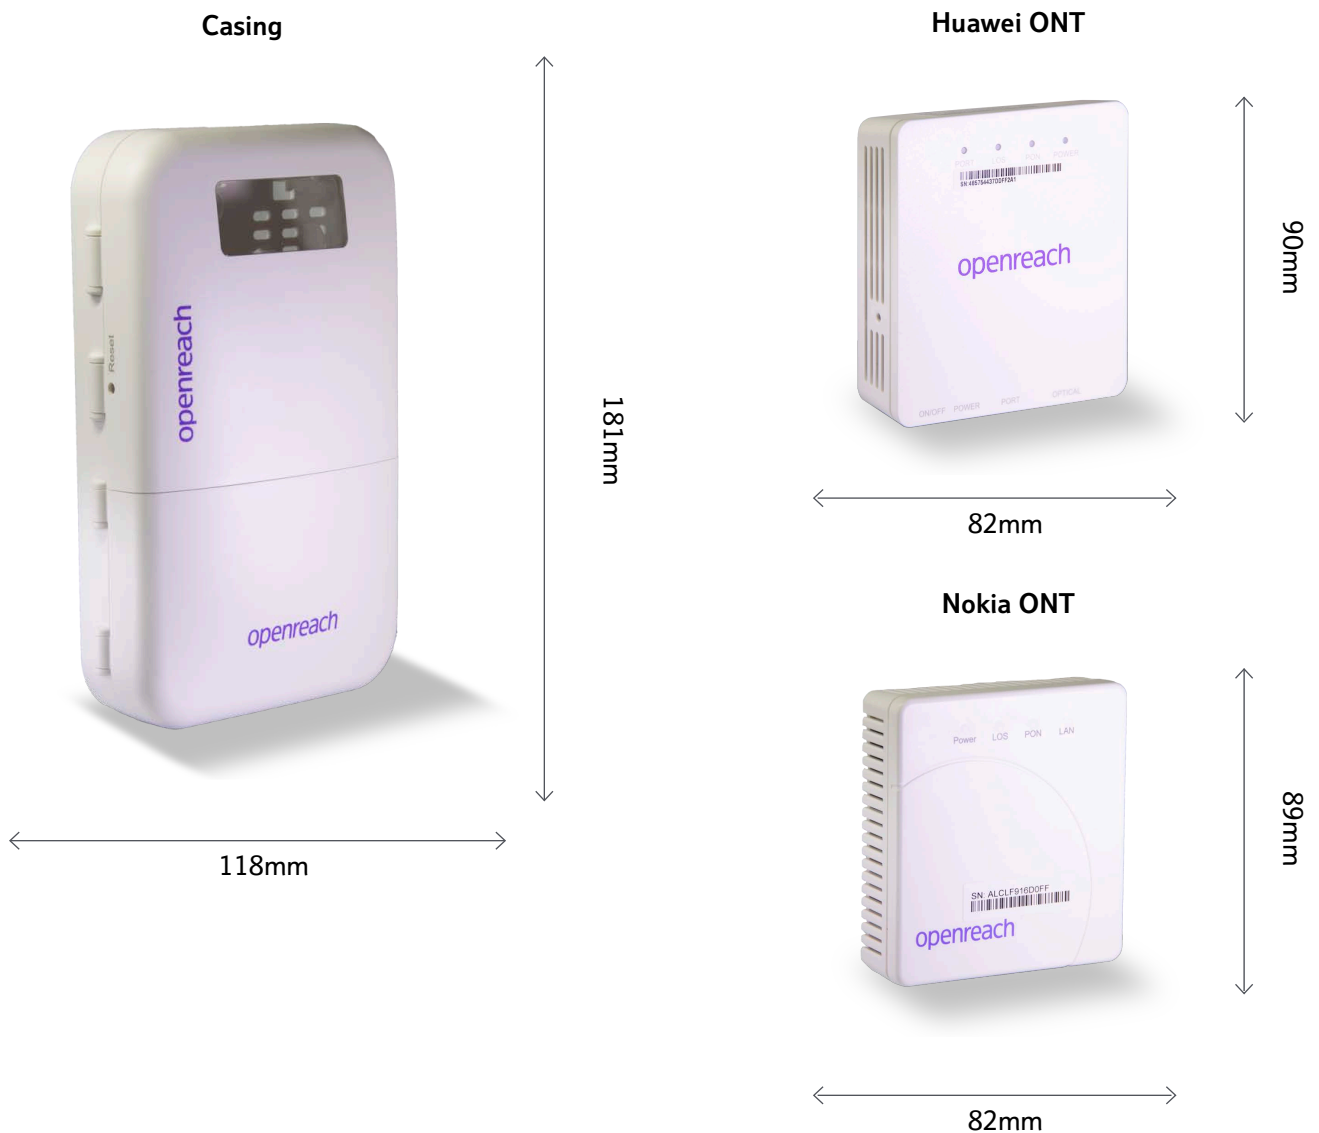

Technical Specifications

Dimensions (H x W x D) (mm)	181 x 118 x 45 (Casing) – 89 x 82 x 25 (Nokia) – 90 x 82 x 25 (Huawei)
Weight	288g (Casing + ONT) – 100g (ONT)
Operating Temperature	-5°C to +45°C

Attaching to Wall

- The casing is designed to be attached to a back box, either vertically or horizontally
- It can be mounted directly on the wall, if mounting over a back box is not an option
- A mounting template is included if wall mounting is required, showing the positions of the holes required to be drilled

Attaching horizontally to a double back box




Cable Connections

- Connect the Openreach optical fibre to the green OPTICAL port on the ONT
- Connect the power adapter to the black POWER/PWR port on the ONT, then plug the power adapter into the power socket
- Connect the ethernet cable to the yellow PORT/GE port on the ONT. The homeowner will then connect this to their communication provider's router or internal network

Ethernet port

Power port

Optical fibre port

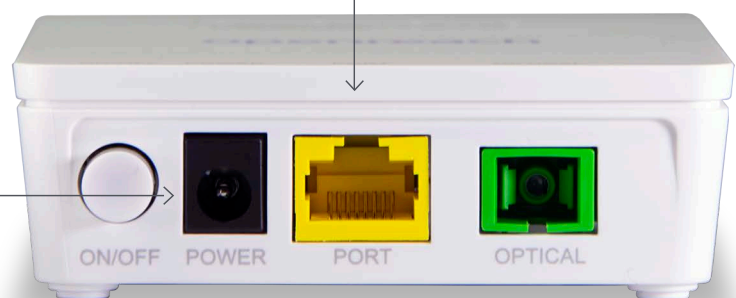

openreach.co.uk

Openreach is Britain's digital network business. We connect homes, mobile phone masts, schools, shops, banks, hospitals, libraries, broadcasters, governments and businesses – large and small – to the world. © British Telecommunications plc 2021. Openreach Limited. Registered office: Kelvin House, 123 Judd Street, London WC1H 9NP. Registered in England and Wales no. 10690039. Produced by Openreach. Designed by Westhill.co.uk

PHME 86785